
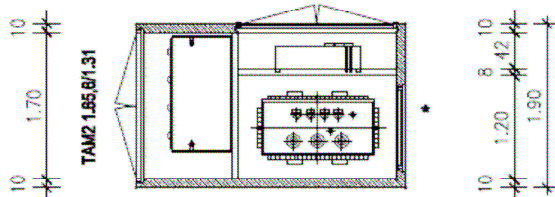
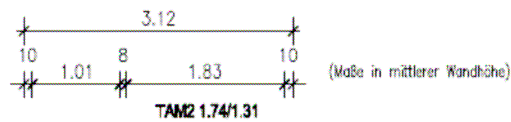
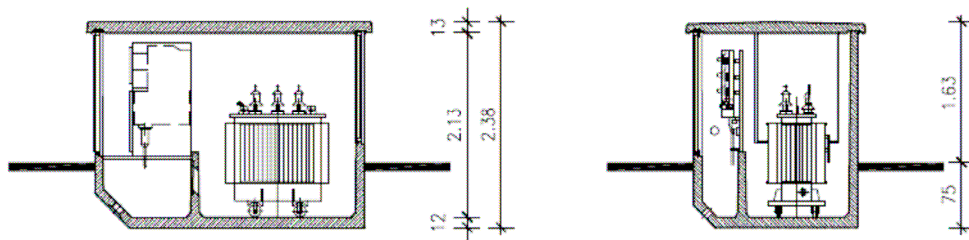


UKL 3119L compact station

09/2008

www.betonbau-international.com

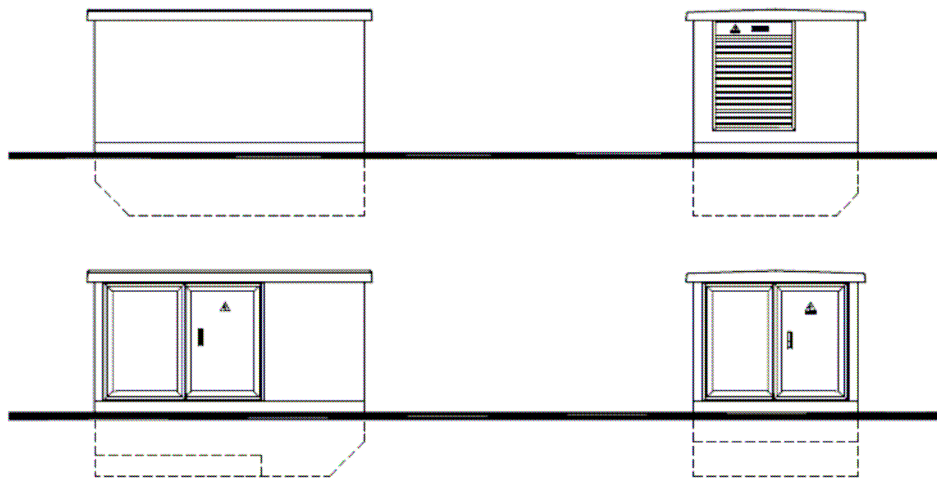

Körpergewicht: 68.5 kN (ohne ELT-Ausbau)
Dachgewicht: 16.0 kN

* optional

1x Stecklüfter
LLS 93/1.22
Fo = 0.48 m²



Lüftertür
TAML 82,2/1.16
Fo = 0.36 m²



This drawing is copyright protected, all rights reserved. In particular, the reproduction, distribution, adaptation, public communication and making available to the public (especially on the Internet) without the consent of BETONBAU is not allowed. Technical changes are reserved.

UKL 3119L compact station

09/2008

www.betonbau-international.com

The UKL 3119L compact station is utilised in great numbers, provides the safety and quality required for substations and is a space-saving solution for many tasks.

An integrated false floor simultaneously serves as a foundation, enabling subterranean laying of cables .

The transformer chamber is designed as an oil drip basin and provides the required water pollution control without an additional coating, thanks to the LD (liquid-tight) quality of the concrete.

The roof is designed as a separate roof slab with a slight sloop down to two sides. It is slid into position and can be removed when changing the transformer or equipment.

The station shell consists of high-strength reinforced concrete with a strength category of C35/45 and exposure classes XC4, XF1 and XA1 complying with DIN 1045-2-EN 206.

Station equipment includes two double-leaf aluminium doors and a ventilation element. The ventilation element is an integrated ventilator (optionally a ventilating door) for overhauling of the transformer room.

Technical data for UKL 3119L

- Design conforms to IEC 62271-202 (VDE 0671 Part 202)
- Accidental arcing security testing with commercially-available SF₆ switchgear.
- Transformers up to 630 kVA
- Anodised aluminium doors and ventilation elements
- Large free ventilation cross section, thanks to optimised flow coefficients
- External facade available in different colours
- Different external facade surfaces can be realised (e.g. clinker brick, timber, synthetic resin float finish).
- Built-up space: 6.00 m²
- Structure shell weight (without electrical fittings): 68.5 kN
- Roof weight: 16 kN